



RS422 DE9 CONNECTOR
CHART FOR DE9 PIN-OUT

PIN NBR	RS 422 SIGNAL
1	NC
2	TX- (RX-)
3	RX+ (TX+)
4	GROUND
5	SPARE (PRIORITY)
6	GROUND
7	TX+ (RX+)
8	RX- (TX-)
9	NC




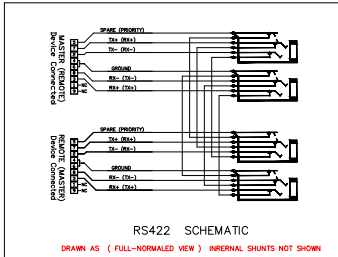


ACCESSORY PART NUMBERS

PART #:	DESCRIPTION
382811-0:	WHITE PROGRAMING SHUNTS
382811-9:	RED PROGRAMING SHUNTS
DE9SLIM1:	DE9 SLIM HOOD WITH THUMB SCREWS
DS-9P/T:	DE9 MALE SOLDER CONNECTOR



CONNECTORS AND SHELL ASSEMBLIES ARE SOLD SEPARATELY.

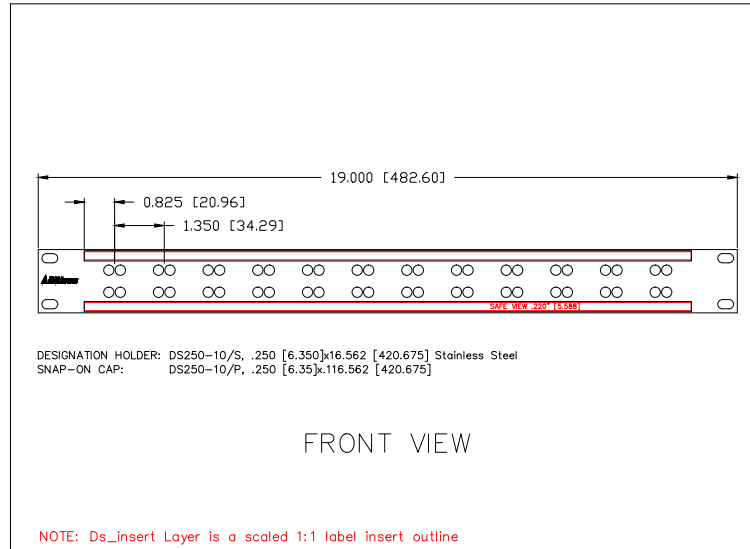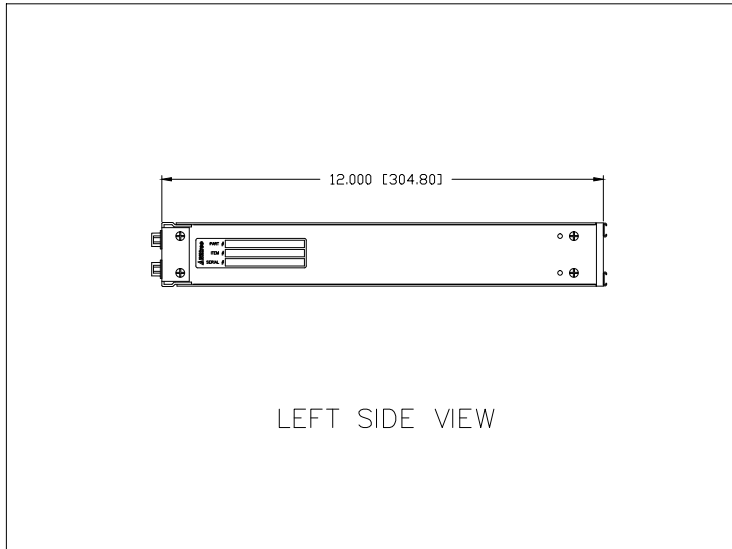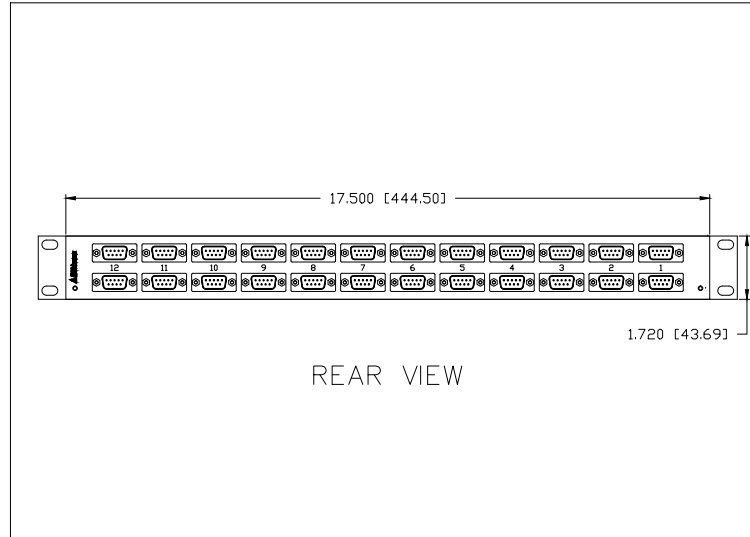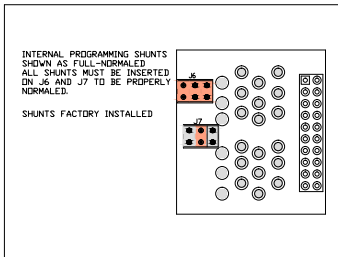

DESIGNATION HOLDER: DS250-10/S, .250 [6.350]x16.562 [420.675] Stainless Steel
SNAP-ON CAP: DS250-10/P, .250 [6.35]x116.562 [420.675]

Bittree
PATCHING SYSTEMS
AUDIO, VIDEO, SERIAL DATA
600 WEST ELK AVENUE
GLENDALE, CA. 91204
TEL 818 500-8142
FAX 818 500-7062
WWW.BITTREE.COM

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION OF BITTREE INCORPORATED

DWG. NO: B422F16SD912RE

PART NO: B422-F16S/12

SERIES: DATA

DWG. SCALE : FULL

PANEL HEIGHT:
1 RU (1.720") [43.688]

DESIGNATION : DS250-10

FINISH : BLACK POWDER COAT

PANEL MATERIAL:
3/16" [4.7625] ALUMINUM

JACK SCREWS: 4-40X1/4PHPN#2

LAYER (DS_INSERT) IS PROVIDED FOR THE CREATION OF LEGEND STRIPS FOR THIS PATCHBAY. THE RED OUTLINE MATCHES THE SIZE OF INSERT.

PLEASE NOTE THE VIEWABLE AREA IS LISTED IN NOTES BELOW THE FRONT PANEL VIEW.